

For more information, please contact MWRA at (617) 242-5323, or visit www.mwra.com.

WATER QUALITY UPDATE An Analysis of October 2003 Sampling Data

MASSACHUSETTS WATER RESOURCES AUTHORITY
100 First Avenue, Charlestown Navy Yard, Boston, MA 02129



MWRA WATER QUALITY UPDATE

October 2003 Highlights

- **MWRA achieved CT disinfection requirements for the month** at both Ware Disinfection Facility (WDF) and Cosgrove Disinfection Facility (CDF). Chlorine dose at CDF remained at 1.4 mg/L. Dose at Norumbega remained at 1.5 mg/L. The running annual averages for DBPs are higher this year as compared to last year. CT results appear on Page 5. No community samples violated the Total Coliform Rule criteria. See Page 6. DBP results appear on Page 7.
- **The Cosgrove Tunnel was shut down on November 1st**. Water is supplied through the rehabilitated Wachusett Aqueduct, the new MetroWest Water Supply Tunnel, and the new Norumbega Covered Storage Tanks.
- **There were two brief turbidity spikes (15 minutes in duration each) at the Cosgrove Intake for October**; 1.29 NTU on the 4th due to testing of the turbine generator and 1.09 NTU on the 15th for unknown reasons. CT was met at all times, and chlorine residuals downstream were maintained. Coliform results at downstream sites on October 4th, 5th, 15th, and 16th were coliform free (Shaft C is collected M-F, Norumbega Cabinet and Shaft 9A are sampled 7 days per week. See Page 5 for details.
- **The Cosgrove Intake Facility on the 4th and 15th had two turbidity spikes at the Wachusett Reservoir** that exceeded the DEP standard of 1 NTU. Fecal coliform samples were negative for this period of time. CT was monitored and maintained as well. See page 4 for details.
- **Boston had thirty no water complaints on the 16th**. MWRA staff shutdown a section of the pipeline on Bennington Street in Revere to make a main line valve repair.

Let us know what you think [\(617\) 242-5323](tel:6172425323)

Release Date: November 20, 2003

Water Quality Update


This is a monthly report containing information about the quality of water supplied by MWRA. It provides a more detailed review of water quality than the annual water quality report that is mailed each June to customers in our service area. The report is available at www.mwra.com.

The Water System

MWRA provides about 250 million gallons of water each day to 46 cities and towns in Massachusetts. Each municipality is responsible for distributing the water within its own community. More than two million people are served by the MWRA water supply system.

Quabbin Reservoir is the primary source of water for our system and one of the country's largest water supply impoundments, with a capacity of 412 billion gallons. Quabbin water represents source water for the Chicopee Valley Aqueduct (CVA) system. Water is transferred from Quabbin Reservoir to the 65 billion gallon Wachusett Reservoir in Clinton via the Quabbin Aqueduct. Wachusett water represents source water for MetroWest and Metropolitan Boston communities. The watershed areas of the Quabbin and Wachusett Reservoirs total 401 square miles. The Department of Conservation and Recreation (DCR), which manages the watersheds, and MWRA are committed to protection of the water supply through aggressive watershed protection as the first line of defense against water contamination. Three-quarters of the watersheds are protected lands and over 80% are either forest or wetlands.

The map below indicates the location of reservoirs, treatment facilities, and service communities.

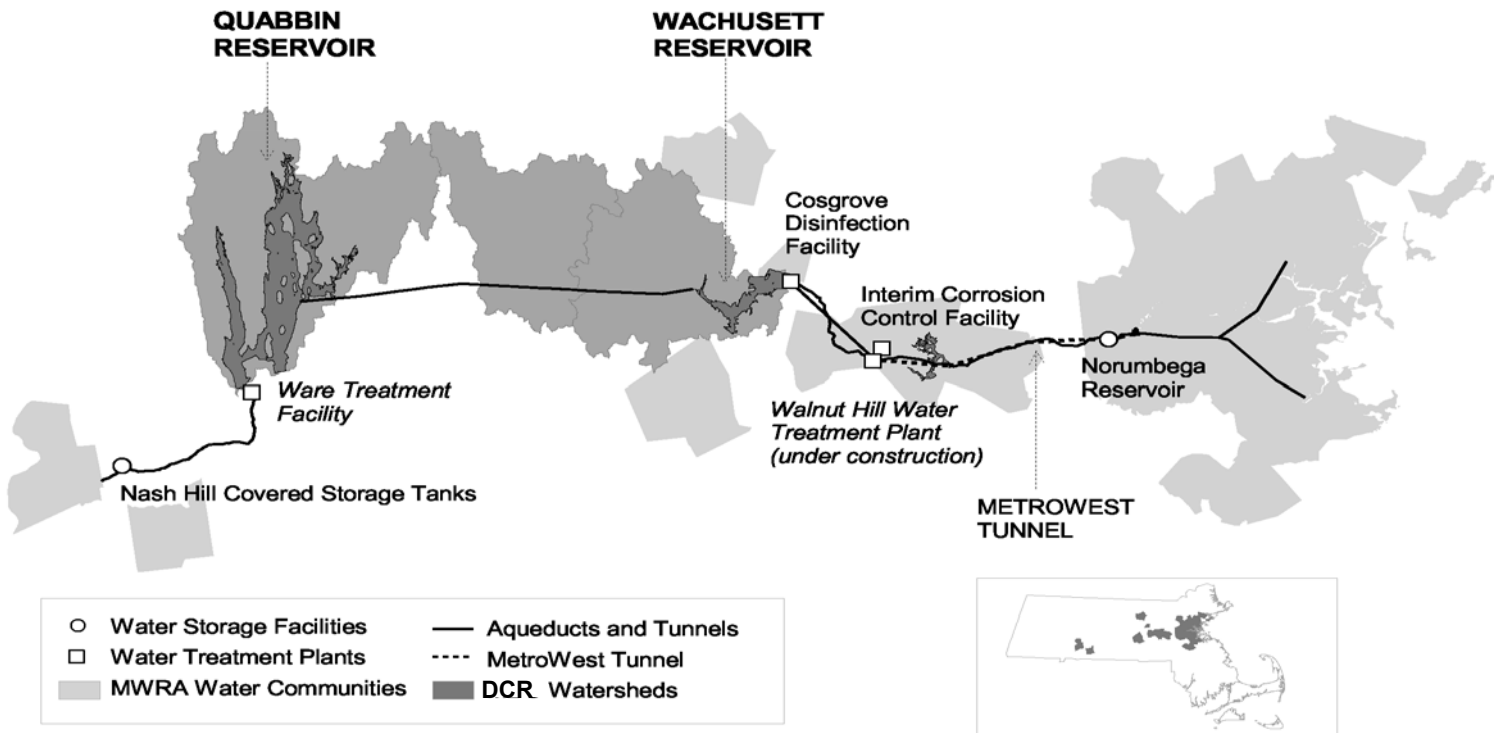

Indicators of Water Quality

Tests are conducted on water sampled at the source reservoirs (source or raw water) and also on water after treatment (treated water). MWRA routinely uses six general indicators of water quality: microbial, corrosiveness, disinfection by-products, turbidity and algae, disinfectant residual, and mineral analysis. Testing frequencies vary by parameter.

The Federal Safe Drinking Water Act (SDWA) sets standards for source and treated water quality. The standards relate to coliform, turbidity, watershed protection, disinfection and disinfection by-products, over 120 potential chemical contaminants, and waterborne disease outbreaks. MWRA monitors for these parameters on schedules ranging from daily to annually.

Customer communities must also meet certain standards under the SDWA concerning distribution of treated drinking water. The Total Coliform Rule (TCR) helps to alert communities to possible microbial contamination as well as the adequacy of residual disinfection within the local distribution system. MWRA tests over 1500 samples per month. Under the SDWA, a violation of the TCR occurs when greater than 5% of the samples in a community are positive for total coliform during a month.

Source Water – Microbial Results

October 2003


Source Water - Microbial Results

Total coliform bacteria are monitored in both source and treated water to provide an indication of overall bacteriological activity. Most coliforms are harmless. Fecal coliform is a subclass of the coliform group which are identified by their growth at temperatures comparable to those in the intestinal tract of mammals. They act as indicators of possible fecal contamination. The Surface Water Treatment Rule for unfiltered supplies requires that no more than 10% of source water samples prior to disinfection over any six-month period have over 20 fecal coliforms per 100ml.

Sample Site: Quabbin Reservoir

Quabbin Reservoir water is sampled at Winsor Dam before entering the CVA system. MWRA met the six-month running average standard for fecal coliform continuously at this location over the last year.

One of the 31 samples were positive during October. Colony count was in the single digits.

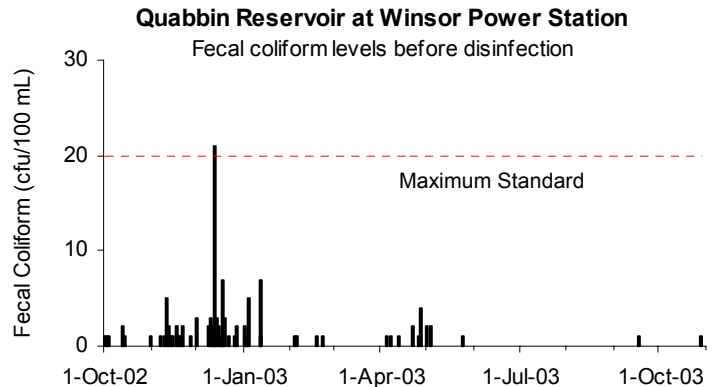


Sample Site: Wachusett Reservoir

Wachusett Reservoir water is sampled at Cosgrove Intake before entering the MetroWest and Metropolitan Boston systems. MWRA met the six-month running average standard for fecal coliform continuously at this location over the last year.

Fecal coliform levels tend to increase during the winter, because, when water bodies near Wachusett ice over, waterfowl seek open water. Many roost at Wachusett, which tends to freeze later in the year than smaller ponds nearby. The DCR has an active bird harassment program to move the birds away from the intake area.


Twenty-one of the 23 samples were positive during October. Colony counts were below the standard of 20 cfu/ 100ml.

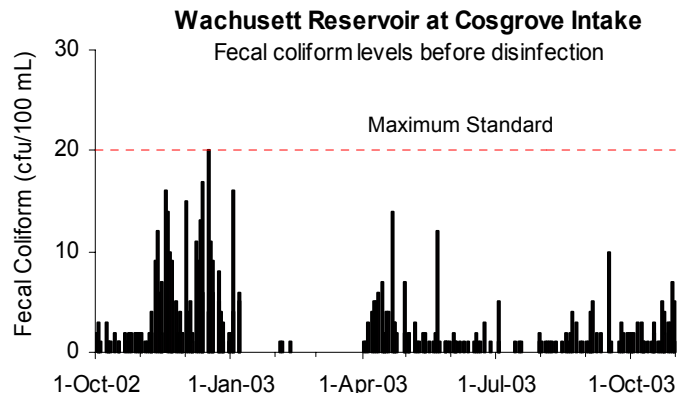

Sample Site: Norumbega Reservoir

Norumbega Reservoir in Weston receives flows from Wachusett for temporary storage each day during low demand hours, which are then discharged during high demand. Norumbega water is sampled from the shore near the gatehouse before disinfection. Coliform levels are elevated periodically, partly because samples collected from the shore of this small reservoir are more susceptible to local disturbances. Covered storage is scheduled to replace this open reservoir in 2004.

Eighteen of the 31 samples from water taken along the shore were positive for fecal coliform during October. Seasonally, coliform levels tend to increase due to rain, warm temperatures, wind direction, and birds.


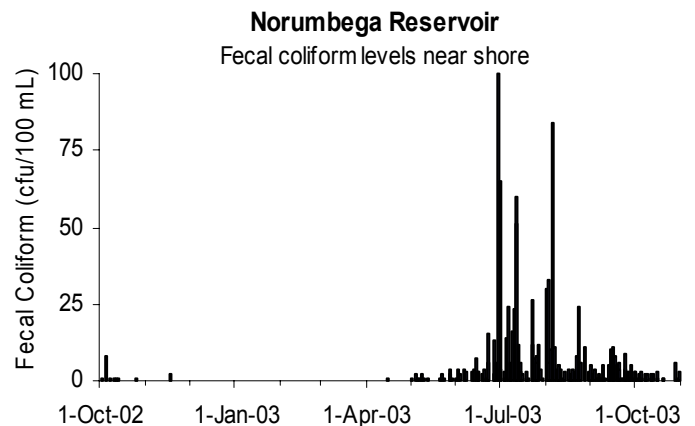


Source Water – Turbidity and Algae Results October 2003

Source Water – Turbidity Results

Turbidity is a measure of suspended and colloidal particles including clay, silt, organic and inorganic matter, algae and microorganisms. The effects of turbidity depend on the nature of the matter that causes the turbidity. High levels of particulate matter may have a higher chlorine demand or may protect bacteria from the disinfectant effects of chlorine, thereby interfering with the disinfectant residual throughout the distribution system.



Samples for turbidity from Quabbin Reservoir are collected at the Ware Disinfection Facility before chlorination. Samples from Wachusett Reservoir are taken at Cosgrove Intake before chlorination. The Massachusetts Department of Environmental Protection standard for source water turbidity for unfiltered water supply systems is a maximum of 1.0 NTU; the EPA standard is a maximum of 5.0 NTU. Maximum turbidity results at Quabbin Reservoir were within DEP standards for the month. Wachusett Reservoir exceeded the DEP standard for October. There were two brief turbidity spikes (15 minutes in duration each); 1.29 NTU on the 4th due to testing of the turbine generator and 1.09 NTU on the 15th for unknown reasons. CT was met at all times, and chlorine residuals downstream were maintained. Coliform results at downstream sites on October 4th, 5th, 15th, and 16th were coliform free (Shaft C is collected M-F, Norumbega Cabinet and Shaft 9A are sampled 7 days per week).

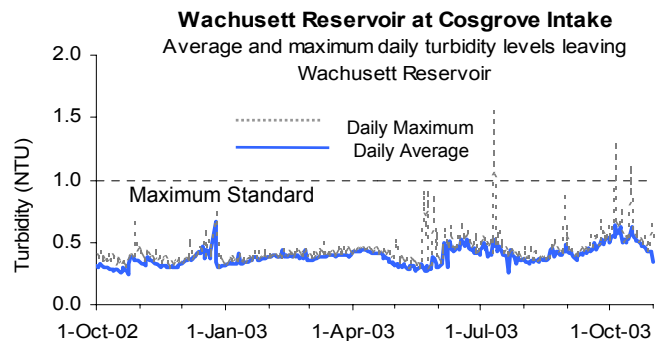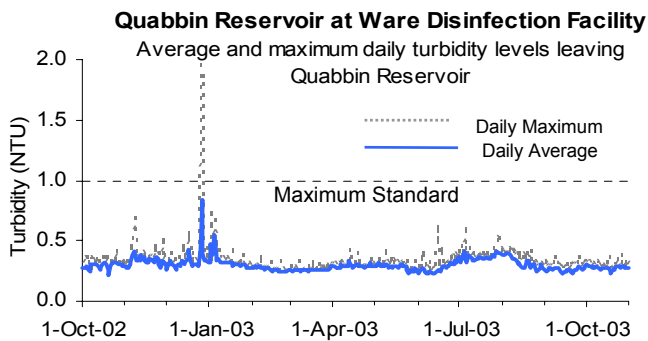

Source Water – Algae Results

Algal levels in reservoirs are monitored by DCR and MWRA. These results, along with taste and odor complaints, are used to make decisions on source water treatment for algae control. Most taste and odor complaints at the tap are due to algae, which originate in source reservoirs, typically in trace amounts. Occasionally, a particular species grows rapidly, increasing its concentration in water. When *Synura*, *Anabaena*, or other nuisance algae blooms, MWRA may treat the reservoirs with copper sulfate, an algacide.

Of 44 complaints received during October from local water departments, three concerned taste and odor that may be due to algae.

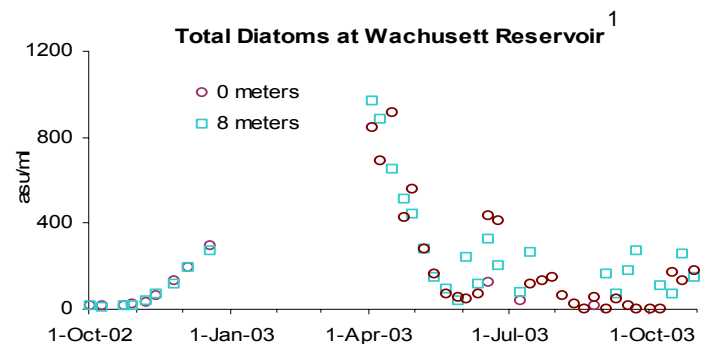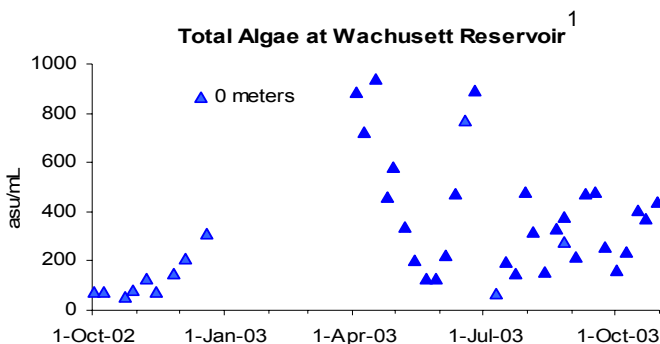

1. Algae samples collected between 0 to 3 meters represent the same area of water column and are generally equivalent. These samples will be shown in the graphs as 0 meters.

Treated Water – Disinfection and pH Results

October 2003

Treated Water - Primary Disinfection



MWRA provides disinfection adequate to achieve EPA's requirement of 99.9% inactivation of *Giardia* cysts and 99.99% inactivation of viruses in drinking water using a calculation based on three sample points that DEP approved in June, 1999. The two-point timeslice, three-point timeslice, or integrated methods are alternative calculation methods which can also be used to comply with CT regulations.

CT achievement for *Giardia* assures CT achievement for viruses, which have a lower CT requirement. The concentration (C) of the disinfectant in the water over time (T) yields a measure of the effectiveness of disinfection, CT. The required CT varies with disinfectant type, water temperature, pH, and other factors. MWRA calculates daily CT inactivation rates at maximum flow, as specified by EPA regulations.

Wachusett Reservoir at Cosgrove Disinfection Facility (MetroBoston Supply):



On October 1, 2003, a sample pump at Shaft A failed, depriving MWRA of sample results necessary to calculate the three-point timeslice. The two-point method remained the best available measure of CT compliance approved by DEP.

Chlorine dose remained at 1.4 mg/L. CT was met each day in October, as well as every day for the last year.

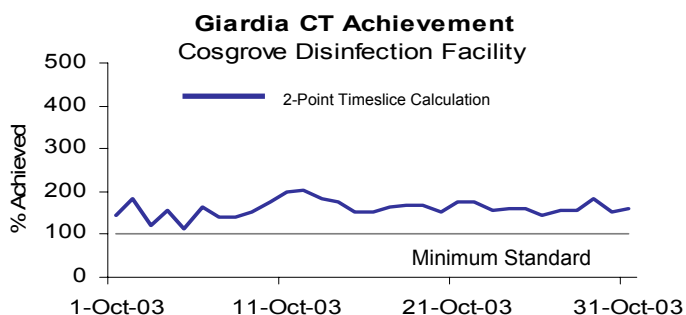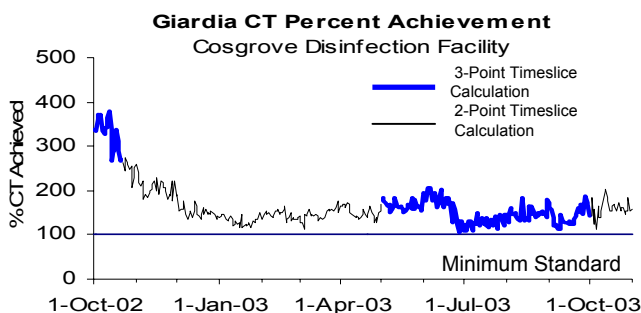



Quabbin Reservoir at Ware Disinfection Facility (CVA Supply):

Chlorine dose remained at 1.3 mg/L. CT was met each day in October, as well as every day for the last year.

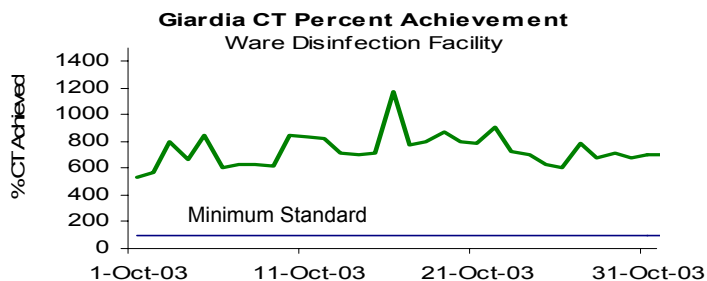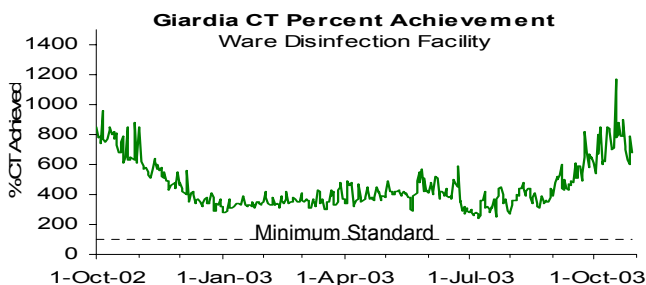

Treated Water – pH and Alkalinity Results

MWRA adjusts the alkalinity and pH of Wachusett water to reduce its corrosivity in order to minimize the leaching of lead and copper from service lines and home plumbing systems into the water. MWRA's target for distribution system pH is 9.1 and alkalinity is 35 mg/L. MWRA's goal is to have 80% of distribution system pH samples fall between 8.8 and 9.4. MWRA staff collects and analyzes samples for pH from 28 community locations on a biweekly schedule to measure pH levels. In October, 100% of the samples were within the target range.

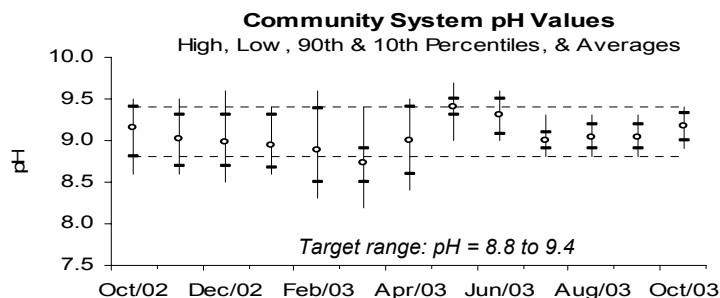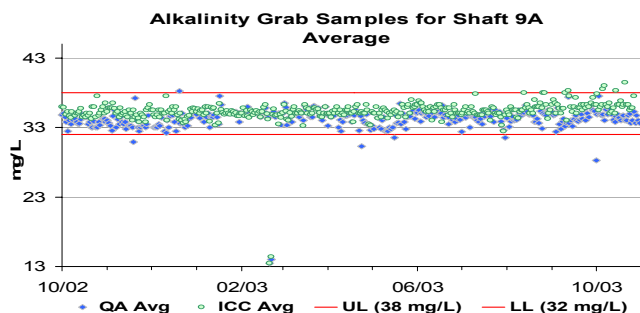

Bacteria & Chlorine Residual Results for Communities in MWRA Testing Program

October 2003

Background

While all communities collect bacteria samples for the Total Coliform Rule (TCR), 36 cities and towns (including Westboro State Hospital) use the MWRA Laboratory for Total Coliform Rule compliance testing. These communities collect samples for bacteriological analysis and measure water temperature and chlorine residual at the time of collection. Cambridge conducts their own monitoring. The other 9 MWRA customer communities have their samples tested elsewhere and these towns should be contacted directly for their monthly results.

There are 144 sampling locations for which the MWRA is required to report TCR results. This includes a subset of the community TCR locations as well as sites along the MWRA transmission system, water storage tanks and pumping stations.

The SDWA requires that no more than 5% of all samples may be total coliform positive in a month (or that no more than 1 sample be positive when less than 40 samples are collected each month). Public notification is required if this standard is exceeded.

Escherichia coli (*E.coli*) is a specific coliform species that is almost always present in fecal material and whose presence indicates likely bacterial contamination of fecal origin. If *E. coli* are detected in a drinking water sample, this is considered evidence of a critical public health concern. Additional testing is conducted immediately and joint corrective action by DEP, MWRA, and the community is undertaken. Public notification is required if follow-up tests confirm the presence of *E. coli* or total coliform. MWRA considers a disinfectant residual of 0.2 mg/L a minimum target level at all points in the distribution system.

Highlights

None of the 1803 community samples (0.00% system-wide) tested positive for confirmed total coliform during the month of October. No samples tested positive for *E. coli*. One of the 689 MWRA samples (0.15%) tested positive for confirmed total coliform. No samples tested positive for *E. coli*. No towns failed the TCR rule for the month.

All thirty-six communities that submitted chlorine residual data maintained an average disinfectant residual of at least 0.2 mg/L. 3.0% of the community samples had a disinfectant residual lower than 0.2 mg/L.

TCR results by Community

Town	Samples Tested for Coliform (a)	Total Coliform # (%) Positive	E.coli % Positive	Public Notification Required?	October 2003 Minimum Chlorine Residual (mg/L)	October 2002 Minimum Chlorine Residual (mg/L)	October 2003 Average Chlorine Residual (mg/L)	October 2002 Average Chlorine Residual (mg/L)
ARLINGTON	68	0 (0%)			0.04	0.04	0.65	0.78
BELMONT	32	0 (0%)			0.05	0.03	0.73	0.75
BOSTON	252	0 (0%)			0.26	0.31	1.16	1.33
BROOKLINE	68	0 (0%)			0.72	0.60	1.26	1.48
CHELSEA	32	0 (0%)			0.03	0.18	1.07	1.11
EVERETT	40	0 (0%)			0.10	0.18	0.78	1.11
FRAMINGHAM (c)	72	0 (0%)			0.23	0.46	1.18	1.32
LEXINGTON	36	0 (0%)			0.15	0.47	1.11	1.38
LYNNFIELD	6	0 (0%)			0.11	0.36	0.61	1.00
MALDEN	60	0 (0%)			0.78	0.07	0.93	0.97
MARBLEHEAD	24	0 (0%)			0.23	0.27	0.97	1.17
MARLBOROUGH (b)(c)	52	0 (0%)			0.21	0.30	1.12	1.39
MEDFORD	68	0 (0%)			0.24	0.06	0.96	0.90
MELROSE	36	0 (0%)			0.03	0.04	0.37	0.64
MILTON	32	0 (0%)			0.21	0.33	0.87	1.12
NAHANT	10	0 (0%)			0.03	0.09	0.56	0.84
NEEDHAM (b)	41	0 (0%)			0.02	0.02	0.41	0.79
NEWTON	110	0 (0%)			0.24	1.01	1.02	1.44
NORTHBOROUGH	13	0 (0%)			0.70	0.25	1.60	1.45
NORWOOD	36	0 (0%)			0.02	0.01	0.71	0.95
QUINCY	104	0 (0%)			0.16	0.10	1.07	1.12
REVERE	65	0 (0%)			0.15	0.48	1.03	1.19
SAUGUS	32	0 (0%)			0.98	1.07	1.16	1.34
SOMERVILLE	100	0 (0%)			0.03	0.05	0.87	0.94
SOUTHBOROUGH (c)	10	0 (0%)			0.22	0.21	0.84	0.97
STONEHAM	35	0 (0%)			0.42	0.52	1.13	1.20
SWAMPSCOTT	18	0 (0%)			0.93	0.19	1.07	1.06
WAKEFIELD (b)	55	0 (0%)			0.22	0.14	0.74	0.94
WALTHAM	83	0 (0%)			0.01	0.19	0.82	1.16
WATERTOWN	49	0 (0%)			0.10	0.26	0.55	1.04
WELLESLEY (b)	36	0 (0%)			0.06	0.04	0.39	0.38
WESTBORO HOSPITAL	8	0 (0%)			0.14	0.08	0.65	1.05
WESTON (c)	16	0 (0%)			0.24	0.93	0.63	1.53
WINCHESTER (b)	20	0 (0%)			0.02	0.14	0.50	0.75
WINTHROP	24	0 (0%)			0.11	0.10	0.89	1.05
WOBUURN (b)	60	0 (0%)			0.10	0.03	0.57	0.61
Total:	1803	0 (0%)						
MASS. WATER RESOURCES AUTHORITY (d)	689	1 (0.15%)		no	0.01	0.03	1.06	1.26

(a) The number of samples collected depends on the population served and the number of repeat samples required.

(b) These communities are partially supplied, and may mix their chlorinated supply with MWRA chloraminated supply.

(c) These communities locally chloraminate.

(d) MWRA sampling program includes a subset of community TCR sites as well as sites along the transmission system, tanks and pumping stations.

Treated Water - Disinfection By-Product (DBP) Levels in Communities









October 2003

Total Trihalomethanes (TTHMs) and Haloacetic Acids (HAAs) are by-products of disinfection treatment with chlorine. Chlorination levels, the presence of organic precursors, pH levels, the contact time of water with chlorine used for disinfection, and temperature all affect TTHM and HAA levels. DBPs are of concern due to their potential adverse health effects at high levels. The EPA running annual average standards are 80 ug/L for TTHMs and 60 ug/L for HAA 5. DEP requires that compliance samples be collected quarterly. MWRA samples weekly at some locations, monthly and quarterly at others. **Metro Boston numbers are used for compliance purposes**; results presented below from CVA and MetroWest sampling sites enable MWRA staff to monitor control of MWRA treatment processes. Individual CVA and MetroWest communities are responsible for their own compliance monitoring and reporting. They must be contacted directly for their results.

The running annual average for TTHMs and HAA5s at compliance locations, represented in the graphs at the top of the page, remained below current standards. Average monthly HAA5 TTHM levels at all process control sampling locations for the CVA, MetroWest and Metropolitan Boston communities are slightly higher than those of last year. The CVA system monitoring has been reduced from monthly to quarterly per DEP requirements.

TOTAL TRIHALOMETHANES

HALOACETIC ACIDS

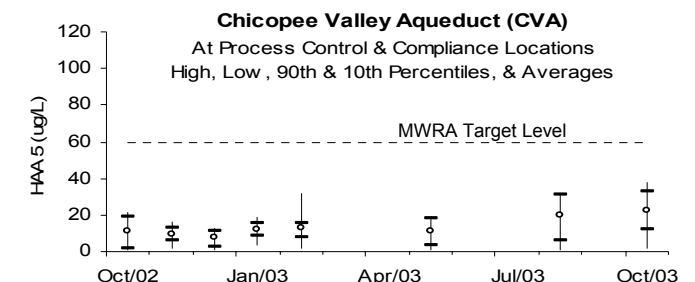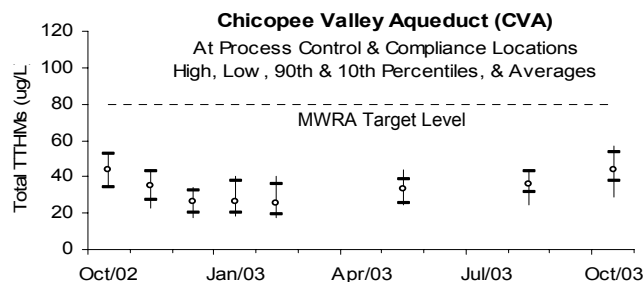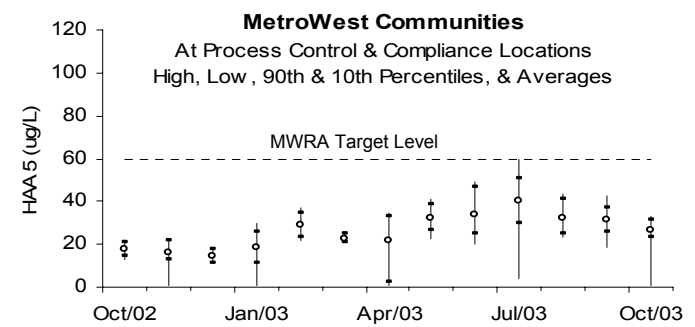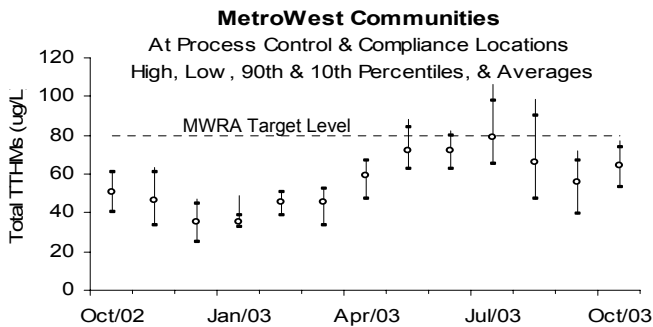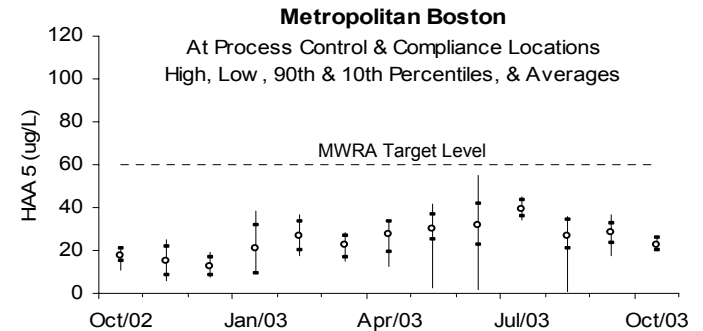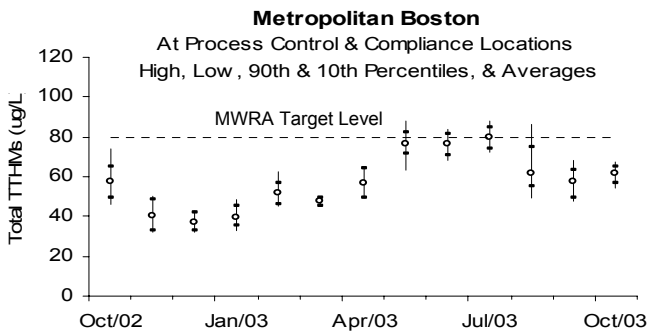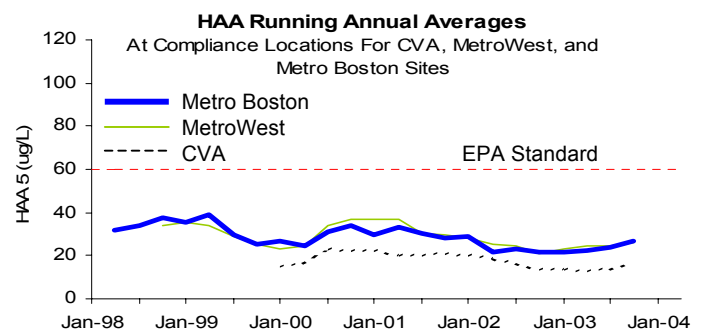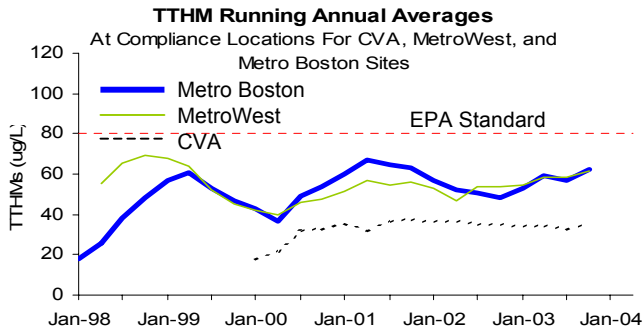

MWRA Monthly Water Quality Analysis

October 2003

This page provides information on water quality at six locations in the MWRA transmission system. Results reflect a "snapshot" in time and may not represent typical conditions. Elevated levels of a particular parameter may occur from time to time. MWRA staff review these numbers carefully and follow-up unusual results by re-analyzing samples, collecting new samples, or auditing sample sites. More rigorous daily or weekly monitoring of select parameters at these and other locations provides a better overall picture of water quality and is reported for some parameters elsewhere in this document. Monitoring for a number of parameters in this table will be reduced to quarterly, if they either (1) have minimal variability or (2) are always below detection levels.

CVA System | Metropolitan Boston | Standards

Component	Quabbin Reservoir at Ware Disinfection Facility (Raw)	Ludlow Monitoring Station (Treated)	Wachusett Reservoir at Cosgrove Intake (Raw)	ICC, Marlboro (Treated)	Comm Ave., Newton (Treated)	Shaft 9A, Malden (Treated)	MCL Standard	Units	Exceedance
Alkalinity	3.0	3.4	5.5	35.1	34.9	34.0		MG/L	
Aluminum	< 10.0	< 10.0	< 10.0	< 10.0	10.4	11.4	50-200 (a)	UG/L	NO
Ammonia-N	0.005	< 0.005	0.007	< 0.005	0.339	0.310		MG/L	
Antimony	< 0.9	< 0.9	< 0.9	< 0.9	< 0.9	< 0.9		UG/L	
Arsenic	< 0.8	< 0.8	< 0.8	< 0.8	< 0.8	< 0.8	50 (b)	UG/L	NO
Barium	5.86	6.23	10.4	10.5	10.3	10.4	2000 (b)	UG/L	NO
Beryllium	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	4 (b)	UG/L	NO
Bromate	< 2.5	< 2.5	< 2.5	< 2.5	< 2.5	< 2.5	10	UG/L	NO
Bromide	11.0	< 2.5	17.6	7.7	8.3	8.3		UG/L	
Cadmium	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	< 0.2	5 (b)	UG/L	NO
Calcium	2240	2290	4970	5080	5120	5060		UG/L	
Chloride	7.0	8.6	25.3	26.2	27.3	26.9	250 (a)	MG/L	NO
Chlorine, Free	NS	0.65	NS	0.29	NS	0.01		MG/L	
Chlorine, Total	NS	NS	NS	0.59	1.65	1.62		MG/L	
Chromium	< 0.6	< 0.6	< 0.6	< 0.6	< 0.6	< 0.6	100 (b)	UG/L	NO
Coliform, Fecal, MF Method	0	NS	0	NS	NS	NS	20 (c)	CFU/100 mL	NO
Coliform, Total, MF Method (e)	0	0	0	0	0	0	100 (c) 0 (d)	CFU/100 mL	NO
Copper **	1.3	1.5	2.7	3.2	2.7	6.2	1300 (b)	UG/L	NO
Cyanide	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	0.2 (b)	MG/L	NO
Fluoride	0.06	0.07	0.07	1.08	1.00	1.10	4 (b)	MG/L	NO
Hardness	7.8	7.9	16.3	16.7	16.8	16.5		MG/L	
Iron **	12.0	12.5	26.3	28.6	29.6	27.9	300 (a)	UG/L	NO
Lead	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2	15 (b)	UG/L	NO
Magnesium	540	533	948	976	970	949		UG/L	
Manganese	2.62	2.24	14.00	14.40	14.70	13.00	50 (a)	UG/L	NO
Mercury	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	2 (b)	UG/L	NO
Nickel	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		UG/L	
Nitrate-N	0.005	0.005	0.034	0.029	0.024	0.027	10 (b)	MG/L	NO
Nitrite	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005		MG/L	
Orthophosphate	< 0.003	0.003	0.004	0.008	0.007	0.007		MG/L	
pH	7.0	7.3	7.0	9.5	9.4	9.4		S.U.	
Potassium	506	510	938	963	971	968		UG/L	
Selenium	< 0.9	< 0.9	< 0.9	< 0.9	< 0.9	< 0.9	50 (b)	UG/L	NO
Silica (SiO2)	1070	1070	1850	2290	2250	2300		UG/L	
Silver	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	< 0.4	100 (a)	UG/L	NO
Sodium	4.5	5.8	14.6	30.1	30.4	29.8		MG/L	
Specific Conductance	48	52	123	185	187	185		UMHO/C	
Standard Plate Count, HPC (48 Hrs @ 35C)	NS	NS	80	2	1	2	500 (d)	CFU/mL	NO
Sulfate (SO4)	5.2	5.2	7.0	7.1	7.2	7.1		MG/L	
Thallium	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		UG/L	
Total Dissolved Solids	25	< 25	41	90	107	109		MG/L	
Total Organic Carbon	1.94	1.70	2.60	2.97	2.78	2.49		MG/L	
Total Phosphorus	< 0.005	< 0.005	< 0.005	0.007	0.012	0.008		MG/L	
UV-254	0.025	0.018	0.055	0.044	0.051	0.051		A	
Zinc **	1.7	2.5	1.1	1.3	1.3	1.4	5000 (a)	UG/L	NO

- (a) = Primary MCL standard (health related). DEP "Drinking Water Regulations", 310CMR 22.00.
- (b) = Primary MCL standard (health related), applies to source (raw) water only. DEP "Drinking Water Regulations", 310CMR 22.00.
- (c) = Primary MCL standard (health related). DEP "Drinking Water Regulations", 310CMR 22.00. Applies to samples of treated water downstream of Wachusett and Quabbin Reservoirs.
- (d) = Secondary MCL standard (aesthetic related). DEP "Drinking Water Regulations", 310CMR 22.00.
- (e) - Confirmed results only are reported

MCL = Maximum Contaminant Level
 CFU = Colony Forming Unit
 S.U. = Standard Units
 UG/L = micrograms per liter = parts per billion

NS = No sample
 NTU = Nephelometric Turbidity Unit
 MG/L = milligrams per liter = parts per million
 < = less than method detection limit

HPC = Heterotrophic Plate Count
 Inv Res = Invalid sample result
 ** = Metal results may be elevated due to local plumbing at the sample tap.

Most results are based on single grab samples collected on October 6, 2003 and analyzed by MWRA and contract laboratories.

NOTE: MWRA tests for cadmium and mercury are more sensitive than the EPA-set levels of detection and reporting. For cadmium any level below 1.0 ug/L and for mercury any level below 0.2 ug/L are under the EPA minimum detection limits. MWRA will continue to report any result below these detection limits here in the monthly report but will follow EPA reporting requirements and not report them in the EPA-regulated annual Consumer Confidence Report.